

HPP

ELECTRO-PERMANENT LIFTER


Features

- Electro-permanent technology means loss of power does not drop the load
- Can be used with existing spreader bars and multiple units with separate controller
- Quick disconnect make it very versatile
- Indicator lights show lifter status
- Two button operation required for safety



Applications

Handling of plates, blocks, bars, finished parts

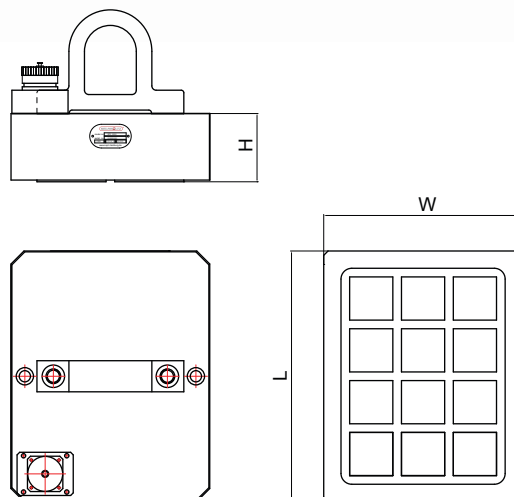

Specifications

mm(inch)

Model	Size	Length(L)	Width(W)	Height(H)	Net Weight	Flat load Max	Min thickness	Flat size Max
HPP	1000	290 (11.42)	230 (9.06)	82 (3.23)	40 kg / 90 lb	1000 kg/2200 lb	8 (0.3)	2000x1000 (78x39)
HPP	2000	410 (16.14)	230 (9.06)	82 (3.23)	58 kg / 127 lb	2000 kg/4400 lb	8 (0.3)	3000x1500 (118x59)
HPP	3000	680 (26.77)	230 (9.06)	82 (3.23)	96 kg / 210 lb	3000 kg/6600 lb	8-15 (0.3-0.6) >15 (>0.6)	3000x1500 (118x59) 4000x2000 (157x78)
HPP	4000	860 (33.86)	230 (9.06)	82 (3.23)	125 kg / 276 lb	4000 kg/8800 lb	8-15 (0.3-0.6) >15 (>0.6)	3000x1500 (118x59) 4000x2000 (157x78)

