


# BLM

## SAFER FIXED BEAM

The BLM spreader beam allows for the mounting of 2 SAFER lifters increasing the load handling characteristics without complicating the overall simplicity of the process.


BLM-1 handles loads up to 800 kgs and 3000mm while BLM-2 handles loads up to 1600kg and 3000mm in length.

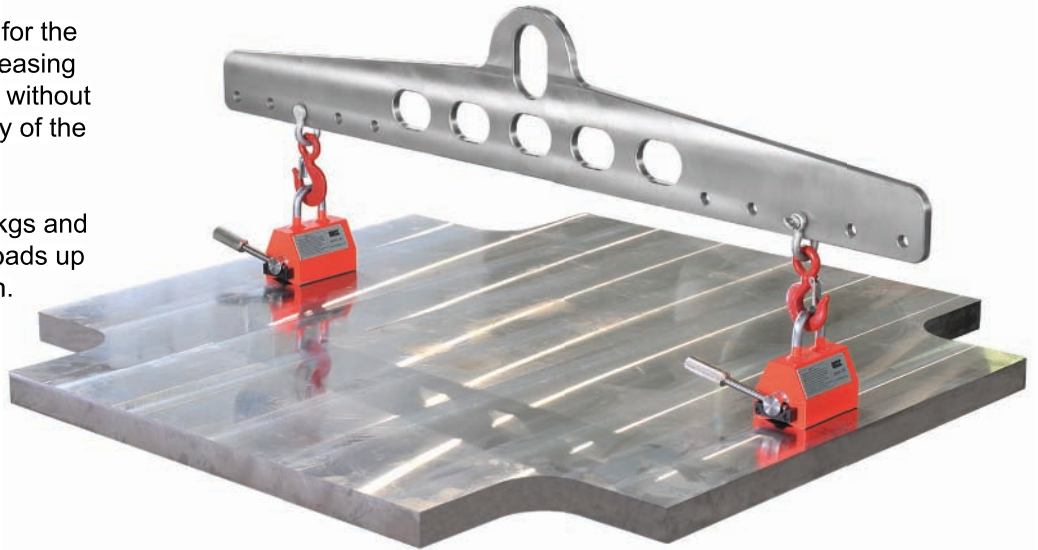

### Dimensions mm(inch)

BLM-1	mm(inch)
A	1680 (66.14)
B	300 (11.81)
C	130 (5.12)
D	15 (0.59)
Weight	37 kg/81.4 lbs

BLM-2	mm(inch)
A	1900 (74.80)
B	415 (16.34)
C	160 (6.30)
D	20 (0.79)
Weight	75 kg/165 lbs

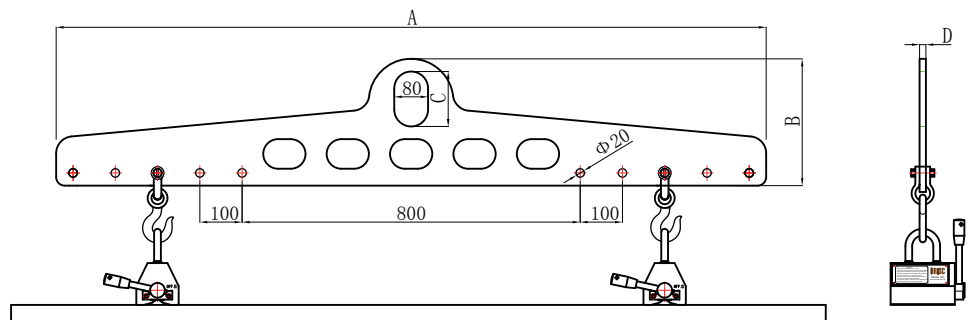

### Load Capabilities mm(inch)

#### BLM-1

in combination with:	Load	Plates		Rounds	
		Max Length	Max Width	Load	Max Length
2 x SAFER-250	400 kg/880 lbs	3000 (118.11)	1500 (59.06)	200 kg/440 lbs	3000 (118.11)
2 x SAFER-500	800 kg/1760 lbs	3000 (118.11)	1500 (59.06)	400 kg/880 lbs	3000 (118.11)

Unit: mm(in)

#### BLM-2

in combination with:	Load	Plates		Rounds	
		Max Length	Max Width	Load	Max Length
2 x SAFER-500	800 kg/1760 lbs	3000 (118.11)	1500 (59.06)	400 kg/880 lbs	3000 (118.11)
2 x SAFER-1000	1600 kg/3520 lbs	3000 (118.11)	1500 (59.06)	750 kg/1650 lbs	3000 (118.11)

Unit: mm(in)